


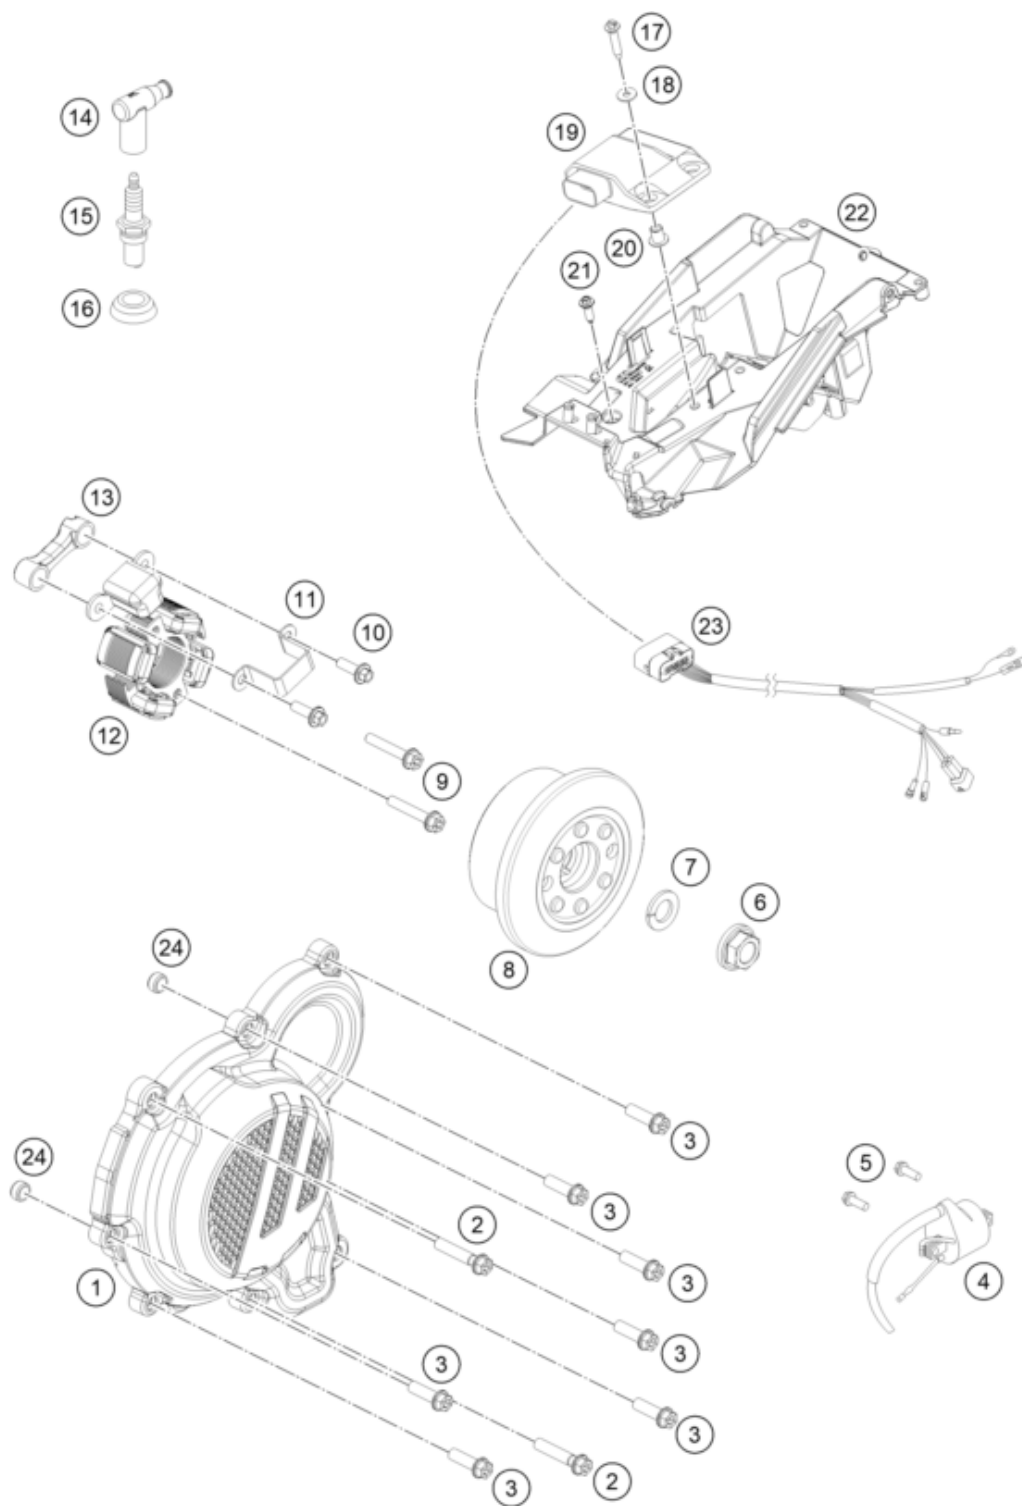

| Pos | Part Number | Description                | Additional Text   | Quantity |
|-----|-------------|----------------------------|-------------------|----------|
| 1   | 55430002000 | IGNITION COVER             |                   | 1.00     |
| 2   | 0025060256  | HH collar screw M6x25 TX30 |                   | 2.00     |
| 3   | 0025060206  | HH collar screw M6x20 TX30 |                   | 7.00     |
| 4   | 59039006000 | IGNITIONCOIL "IG5128"      | ONLY FOR SIX DAYS | 1.00     |
| 5   | 0025050166  | HH collar screw M5x16 TX30 |                   | 2.00     |
| 6   | 49030021000 | COLLAR NUT M12X1 R/S       |                   | 1.00     |
| 7   | 50230029012 | LOCKING RING VSK 12        |                   | 1.00     |
| 8   | 55439005100 | ROTOR                      |                   | 1.00     |
| 9   | 0912050253  | AH SCREW DIN0912-M 5X25    |                   | 2.00     |

|    |             |                                |     |      |
|----|-------------|--------------------------------|-----|------|
| 10 | 0014050163  | HH COLLAR SCREW M 5X16 WS=6    |     | 2.00 |
| 11 | 50439004010 | PICKUP BRACKET                 |     | 1.00 |
| 12 | 55439004000 | STATOR                         |     | 1.00 |
| 13 | 50439013100 | DISTANCE UNIT                  |     | 1.00 |
| 14 | 47039090000 | SPARK PLUG CAP NGK REINFORC.04 |     | 1.00 |
| 15 | 54331093410 | SPARK PLUG NGK BR8ECM          | SX  | 1.00 |
| 16 | 50231012000 | SEALING CUP FOR SPARK PLUG     | 200 | 1.00 |
| 17 | 0017060305  | Special screw K60X30 WS=6      |     | 2.00 |
| 18 | 0021050003  | washer DIN 9021 A - 5.3        |     | 2.00 |
| 19 | 55439031000 | ELECTRONIC CASE 250SX 17       |     | 1.00 |
| 20 | 60308006000 | COLLAR BUSHING 6,2X9,2X15X12,5 |     | 2.00 |
| 21 | 0017060206  | SCREW F. PLASTIC K60X20AL SW6  |     | 1.00 |
| 22 | 79011055000 | BATTERY BOX                    |     | 1.00 |
| 23 | 54839032200 | WIRING HARNESS FOR CDI 2-ST.07 |     | 1.00 |
| 24 | 45230024000 | DOWEL 9,8X7X5.5                |     | 2.00 |