


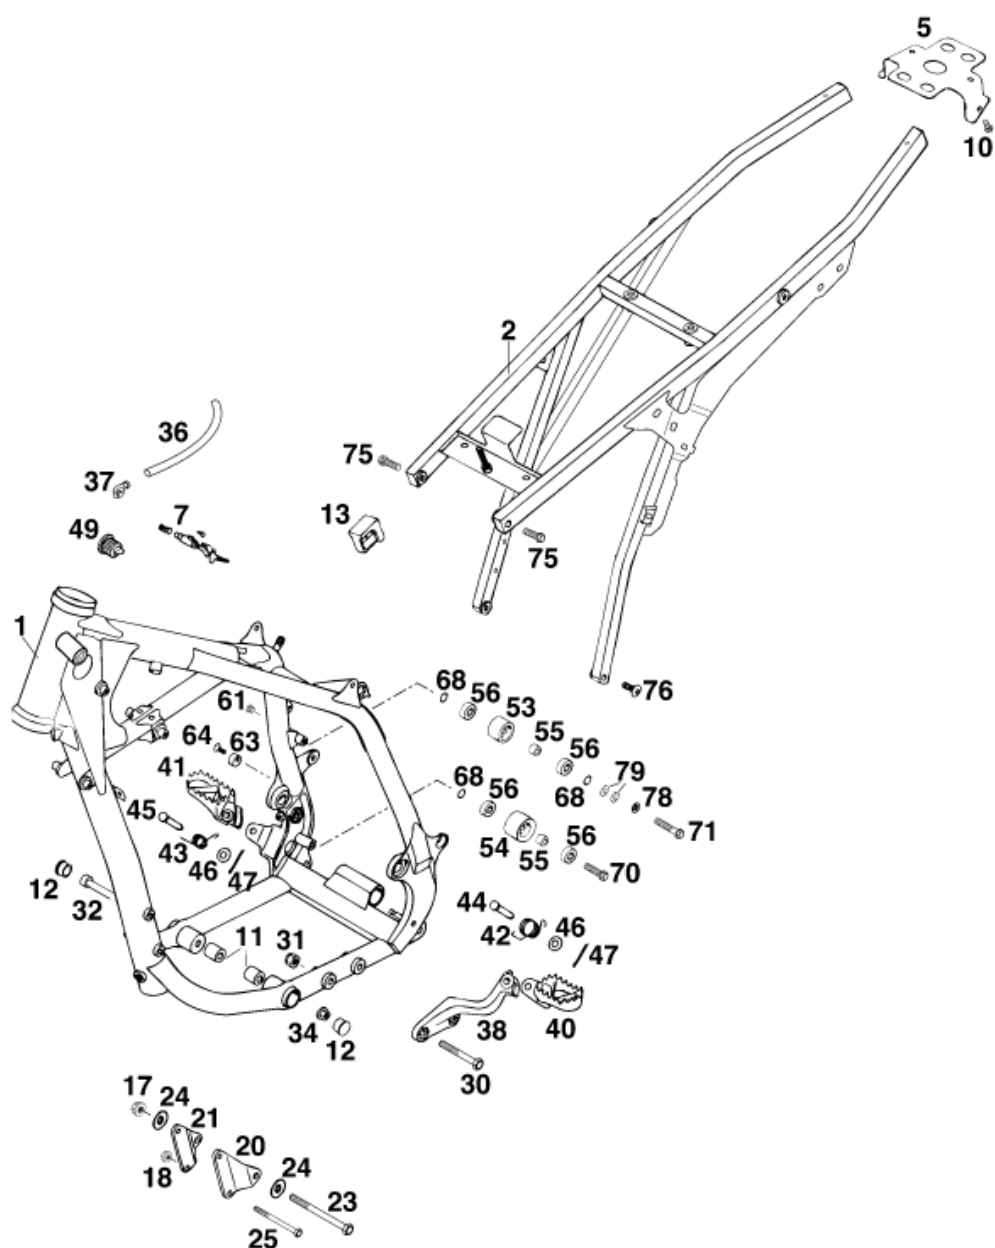

Pos	Part Number	Description	Additional Text	Quantity
1	58303001800	FRAME 400/540 SXC '98		1.00
2	58303102400	% SUB FRAME CPL. ALU '		1.00
5	58303002045	BUSHING EXC-NUMBERPLATECARRIER		1.00
7	71003007000	STEERING HEAD LOCK CPL. ZADI		0.00
10	0015060123	HH COLLAR SCREW M 6X12 WS=8		2.00
11	58003012000	SPACER ROLLER 10,3X20X22		2.00
12	71001012000	PVC CAP D=22MM		2.00
13	58307015000	TANK SUPPORT '93		2.00
17	49009082000	flanged hex nut DIN 6927 M10 W		1.00
18	54310086000			2.00
20	58003055600	ENGINE SUPPORT L/S ALU SX		1.00
21	58003155600	* ENGINE SUPPORT R/S ALU SX		1.00
23	0931101203	HH SCREW DIN0931-M10X120		1.00
24	31004001100	WASHER 10,5 X 21 X 3		2.00
25	0931080803	HH SCREW DIN0931-M 8X80		2.00

30	0931100603	HH SCREW DIN0931-M10X60		2.00
31	0985100003	SELF LOCKING NUT DIN0985-M10		2.00
32	0912101603	AH SCREW DIN0912-M10X160		1.00
34	54630044000	COLLAR NUT M10 WS=13		1.00
36	55007016001	PVC-HOSE 7X10 PER METER		0.00
37	50303089000	ANGLE PIECE '97		1.00
38	58303038000	FOOTREST BRACKET L/S '93		1.00
40	58303040000	FOOTREST L/S '		1.00
41	5460314000019	FOOTREST R/S '93		1.00
42	58303041000	FOOTREST SPRING L/S '93		1.00
43	54603041000	FOOTREST SPRING L/S & R/S		1.00
44	58303044000	BOLT FOR FOOTREST		1.00
45	54603044000	BOLT FOR FOOTREST 9,8 X 50	FS	1.00
46	0125100003	washer DIN 125 A 10.5	ONLY FOR 640 DUKE	2.00
47	0094032253	PIN DIN0094-3,2X25 STEEL		2.00
49	42007049000	PLASTIC CAP		0.00
53	50203053000	CHAIN ROLL D=30MM		1.00
54	50203053100	CHAIN ROLL D=35MM		1.00
55	74003021000	BUSHING 8.2 X 12 X 6		2.00
56	0625006087	Grooved ball bearing 608 2RS C		4.00
61	54403135000	PLASTIC CAP SFL10		1.00
63	58303063000	BRAKE LEVER STOP '93		1.00
64	0991060203	FLAT H.SCREW DIN7991-M6X20		1.00
68	36003014000	LOCK WASHER 8MM		0.00
70	0015080303	HH COLLAR SCREW M 8X30 WS=10		1.00
71	0015080353	HH COLLAR SCREW M 8X35 WS=10	FC	1.00
75	0015080253	HH COLLAR SCREW M 8X25 WS=10		2.00
76	54510052000	SPROCKET SCREW-AH M 8X26		2.00
78	0797080003	TOOTHLOCK WASHER DIN6797-J 8,4		0.00
79	0125080003	washer DIN 125 A -8.4		0.00