


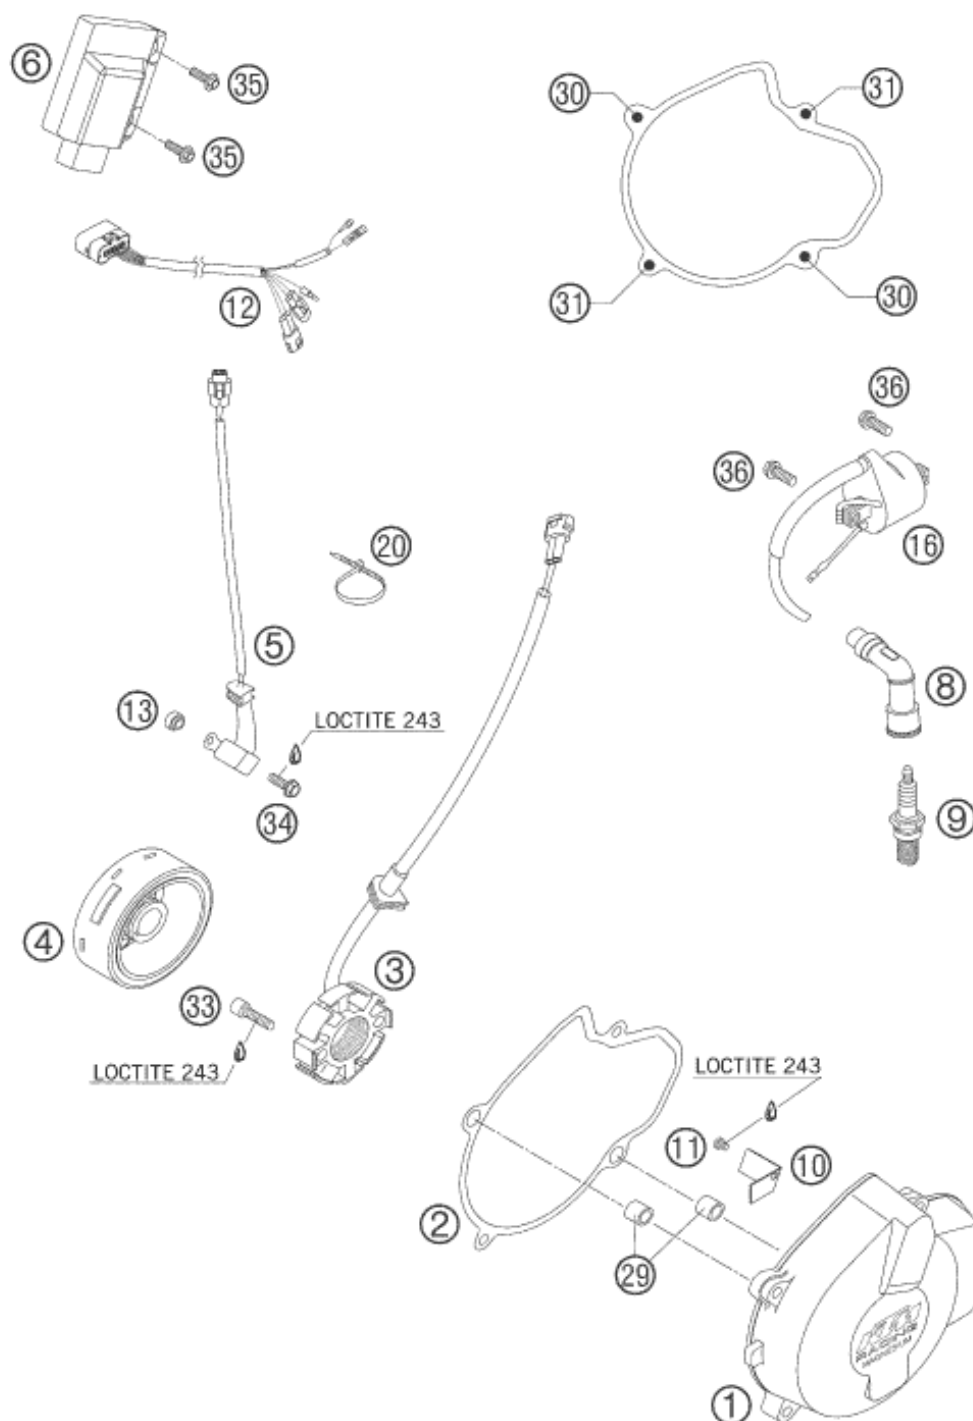

| Pos | Part Number | Description                    | Additional Text | Quantity |
|-----|-------------|--------------------------------|-----------------|----------|
| 1   | 59030002500 | IGNITION COVER 4K3A 2000       |                 | 1.00     |
| 2   | 59030040000 | IGNITION COVER GASKET 0,8MM    |                 | 1.00     |
| 3   | 59039004100 | STATOR CPL. 4K3A RACING 2004   |                 | 1.00     |
| 4   | 59039005100 | FLYWHEEL 4K3A RACING 2004      |                 | 1.00     |
| 5   | 59039034000 | pulse generator KOKUSAN 4K3-A/ |                 | 1.00     |
| 6*  | 59039031600 | CDI UNIT 525 SX 2005           |                 | 1.00     |
| 8   | 59039090100 | SPARK PLUG CONNECT. VD05EG03   |                 | 1.00     |
| 9   | 59039093100 | SPARK PLUG NGK DCPR8E 03       |                 | 1.00     |
| 10  | 59030002050 | SUPPORT FOR WIRE               |                 | 1.00     |
| 11  | 0084040063  | CYL.HEAD SCREW DIN0084-M 4X 6A |                 | 1.00     |

|     |             |                               |                   |      |
|-----|-------------|-------------------------------|-------------------|------|
| 12* | 59439032000 | WIRING HARNESS FOR CDI SX 04  |                   | 1.00 |
| 13  | 59039009000 | SPACER BUSHING 5,2X7X4,8 2000 |                   | 2.00 |
| 16  | 59039006000 | IGNITIONCOIL "IG5128"         | ONLY FOR SIX DAYS | 1.00 |
| 20  | 44011076100 | CABLE TIE 100/2,5MM BLACK     |                   | 0.00 |
| 29  | 49030090000 | DOWEL 9,8 X 7 X 10            | FS-E              | 2.00 |
| 30  | 0015060353  | HH COLLAR SCREW M 6X35 WS=8   | LC4 ADVENTURE     | 2.00 |
| 31  | 0015060303  | HH COLLAR SCREW M 6X30 SW=8   | LC4, LC4 SM, DUKE | 2.00 |
| 33  | 0912050253  | AH SCREW DIN0912-M 5X25       |                   | 2.00 |
| 34  | 0015050163  | HH COLLAR SCREW M 5X16 WS=8   |                   | 2.00 |
| 35  | 0014060203  | HH COLLAR SCREW M 6X20 WS=8   |                   | 2.00 |
| 36  | 0015060163  | HH COLLAR SCREW M 6X16 WS=8   | FE, FS            | 2.00 |

\* = New part