


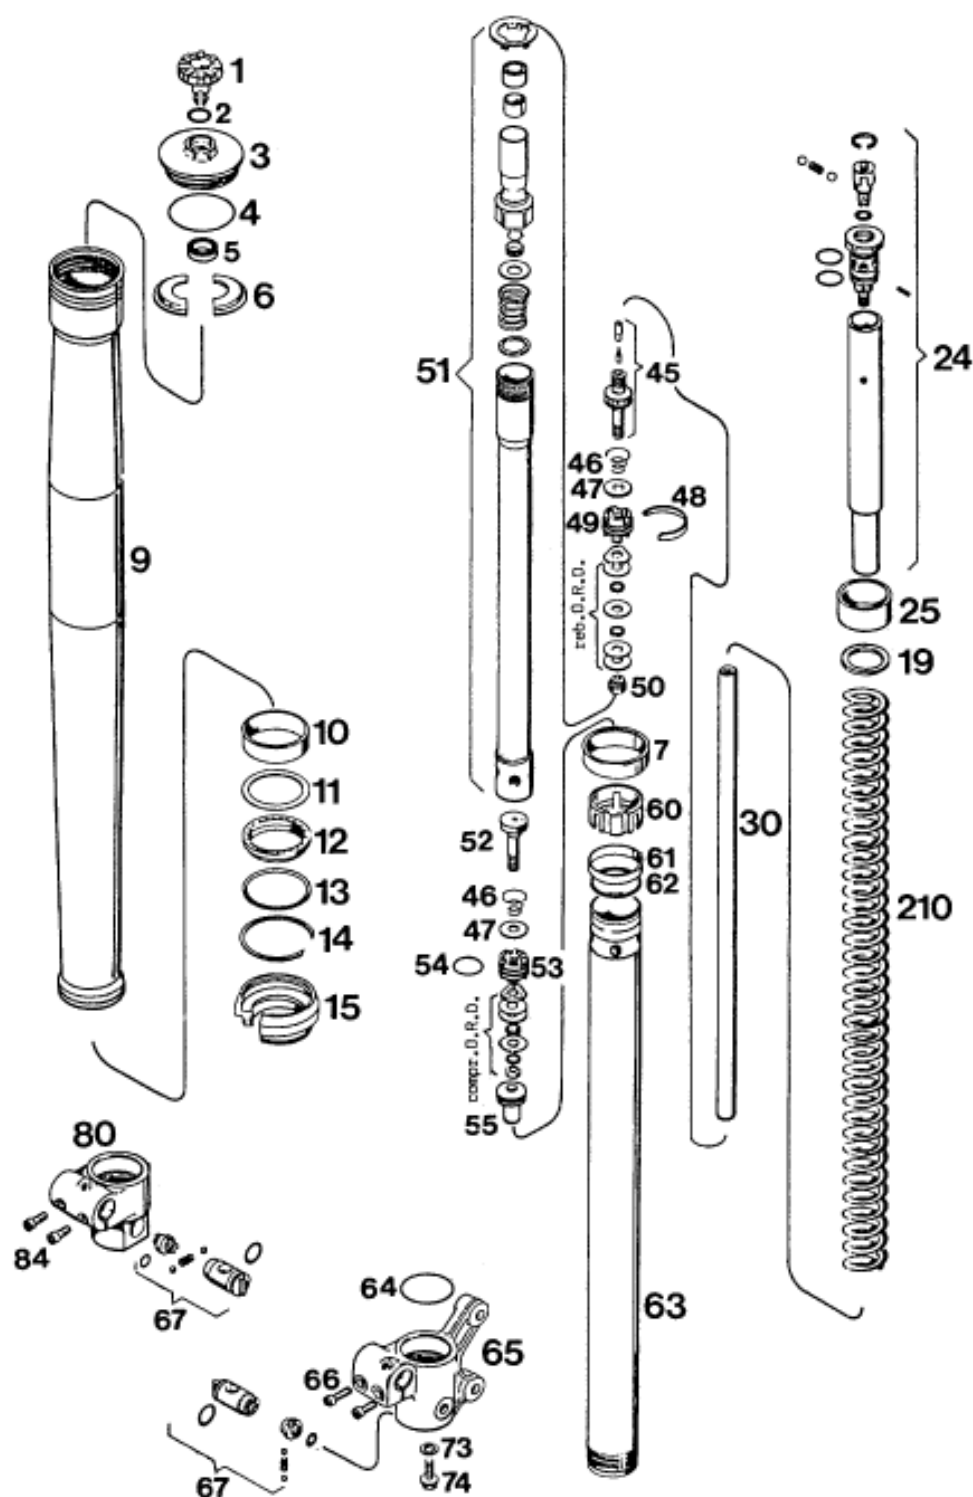

Pos	Part Number	Description	Additional Text	Quantity
1	54501038000	ADJUSTMENT KNOB REBOUND DAMP.		2.00
2	54501039000	% O-RING 12X3		2.00
3	54501036000	* SCREW CAP M 49X1,5		2.00
4	0770430030	O-RING 43,00X3,00		2.00
5	54501051000	* RUBBER GASKET 14,1X22X4		2.00
6	54501050000	% KEY HALF		4.00
7	54501052000	BUSHING 47X21		2.00
9	50201404500	* OUTER TUBE 54/57X606 '93		2.00
10	54501026300	GUIDE BUSHING LOWER		2.00

11	56401027000	RING 42X49,2X1,5		2.00
12	56401005000	SEAL SHAFT RING 40X49,5X7		2.00
13	56401127000	RING 49,5X45X1		2.00
14	56401029000	SEEGER LOCK RING SB50		2.00
15	56401025100	DUST BELLOWS D40 '		2.00
19	54501019000	WASHER 24,5X34X2		2.00
24	54501057044	* HYDROSTOP CPL L=227,5MM		2.00
25	56401022000	* PRELOAD BUSHING 25X34X5		2.00
25	56401022100	% PRELOAD BUSHING 25X34X10		2.00
25	56401022200	* PRELOAD BUSHING 25X34X2,5		2.00
30	54501010000	* SPINDLE 12X551		2.00
45	54501067044	* TAPER REBOUND DAMPING CPL		2.00
46	54501068000	% SPRING		4.00
48	54501070000	* PISTON RING 4X1X62		2.00
49	54501071000	* PISTON REBOUND DAMPING		2.00
50	54501072000	* HEX.NUT M6X0,5		2.00
51	50201473544	* DAMPING TUBE CPL. L=408MM '9		2.00
52	54501074100	* SPECIAL SCREW M6X0,5 D2		2.00
53	54501075000	* PISTON COMPRESSION DAMPING		2.00
54	0770020160	O-RING 15,60X1,78		2.00
55	54501076000	% TAPER M22,3X1 COMPRESSION DA		2.00
60	54501077000	BUSHING		2.00
61	54501045300	BEARING RING 42,8X8		2.00
62	54501046000	% RING 39X42X1		2.00
63	54501003300	% INNER TUBE L=625MM "0618Q712		2.00
64	0770380020	O-RING 38,00X2,00 NBR 70 SH		2.00
65	54501206100	% FORK LEG AX.PASSAG. D17 BREM		1.00
66	0912070253	AH SCREW DIN912 M7x25		2.00
67	54501078144	% ADJUSTMENT SCREW COMP.DAMPIN		2.00
73	54501081000	SEAL RING 8X12X1,5		2.00
74	54501082000	COLLAR SCREW M8X20		2.00
80	54501106100	% FORK LEG AXLE PASSAGE R/S D2		1.00
84	0912070253	AH SCREW DIN912 M7x25		2.00
210	54501021380	* SPRING 530 MM 3,8 KG		2.00
210	54501021405	* SPRING 530 MM / 4,0 KG		0.00
210	54501021420	* SPRING 543 MM / 4,2 KG		0.00
210	54501021440	SPRING 530 MM / 4,4 KG		0.00
210	54501021460	* SPRING 530 MM / 4,6 KG		0.00