


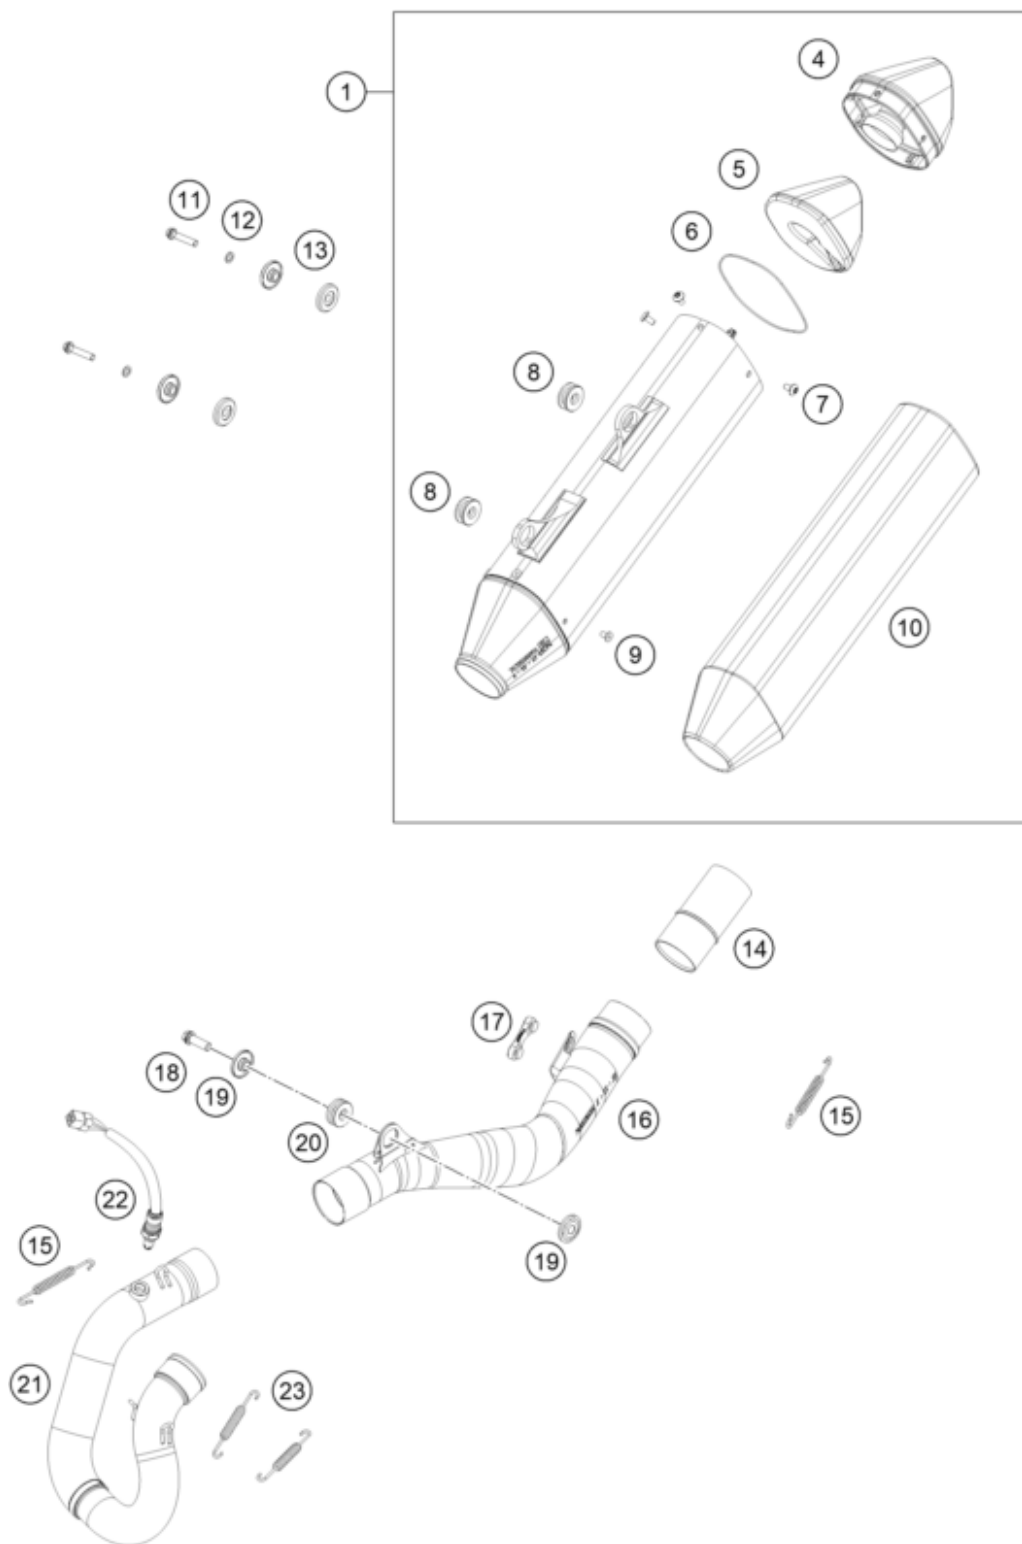

| Pos | Part Number | Description                    | Additional Text | Quantity |
|-----|-------------|--------------------------------|-----------------|----------|
| 1   | 79705081100 | Silencer                       |                 | 1.00     |
| 4   | 79105081060 | Endcap cpl.                    |                 | 1.00     |
| 5   | 79105081086 | Insulating material formed par |                 | 1.00     |
| 6   | 0770800021  | O-RING 80,00X2,00 VITON        | 300             | 1.00     |
| 7   | 78105081010 | SCREW TORX M5X10               |                 | 5.00     |
| 8   | 77205068000 | DAMP. COMPON. BLACK            |                 | 2.00     |
| 9   | 0011480800  | DUMMY RIVET 4,8X 8 NIRO        |                 | 5.00     |
| 10  | 79105081085 | insulating material formed par |                 | 1.00     |

|    |             |                               |                     |      |
|----|-------------|-------------------------------|---------------------|------|
| 11 | 0025060356  | HH collar screw M6x35 TX30    |                     | 2.00 |
| 12 | 50233041000 | Pair of washers M6 NORDLOCK   |                     | 2.00 |
| 13 | 77205169000 | BUSHING 7.5x12x28x8.3 11      |                     | 4.00 |
| 14 | 79105091000 | Catalytic converter           |                     | 1.00 |
| 15 | 50305116000 | TEN.SPRING L=75MM EY.MOVEABLE |                     | 2.00 |
| 16 | 79305010000 | Rear header 350 EXC-F         |                     | 1.00 |
| 17 | 79105098000 | exhaust spacer                |                     | 1.00 |
| 18 | 0025080306  | HH collar screw M8x30         |                     | 1.00 |
| 19 | 77805069000 | BUSHING 8.5x12x28x8.3         | 4 Piece without CAT | 2.00 |
| 20 | 79105068000 | Damper gray                   | 2 Piece without CAT | 1.00 |
| 21 | 79105009000 | Header KTM 250 EXC-F          |                     | 1.00 |
| 22 | 75041090200 | LAMBDA SENSOR                 |                     | 1.00 |
| 23 | 50305016200 | Tension spring L=65 mm        |                     | 2.00 |