

1


ACHTUNG
 Lesen Sie vor der ersten Inbetriebnahme des Fahrzeuges die gesamte Bedienungsanleitung aufmerksam durch!

IMPORTANT
 Please read the entire owner's manual carefully before putting the vehicle into operation for the first time.

ATTENZIONE
 Prima della messa in funzione iniziale del veicolo, leggere con attenzione l'intero manuale d'uso!

ATTENTION
 Lire attentivement l'ensemble du manuel d'utilisation avant de mettre le véhicule en service!

ATENCIÓN
 Lea completa y atentamente el manual de instrucciones antes de poner en servicio por primera vez el vehículo!

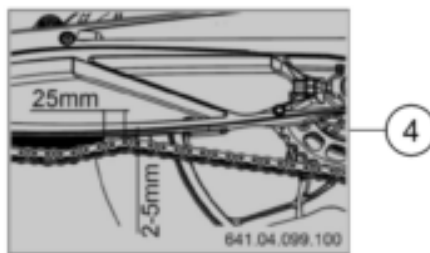

2

890 Duke R		636 03 098 000
Fuel:	RON 95 unleaded (USA = PREMIUM PON 91)	
Tyre front:	120/70 ZR17 M/C (58W)	
Air pressure front:	rider only 2.3 bar (33 psi) max. payload 2.3 bar (33 psi)	
Tyre rear:	160/55 ZR17 M/C (73W)	
Air pressure rear:	rider only 2.5 bar (36 psi) max. payload 2.5 bar (36 psi)	
Max payload:	169kg (373lbs)	
Max. total weight:	430kg (948lbs)	
Engine oil:	fully synthetic 10W50 (5W/40 under 0°C, 32°F)	

Further information see owner's manual

5

E5 E10
 UNLEADED FUEL



3

SETTING See owner's manual	890 Duke R 636 03 097 000		FORK		SHOCK		
	Compression	Rebound	Comp. low speed	Comp. high speed (bars)	Rebound	Preload-Adjuster (bars)	
Comfort	20	20	16	1.5	17	1	
Standard	16	16	14	1.5	14	3	
Sport	4	10	10	1.5	12	5.5	
Max. payload	15	15	14	1.5	11	6	

Pos	Part Number	Description	Additional Text	Quantity
1	50307098000	STICKER "OWNERS MANUAL"		1.00
2	63603098000	Tech. info. sticker		1.00
3	63603097000	Sticker, STD setting		1.00
4	64104099100	Sticker chain tension		1.00
5	21007098000	Sticker fuel labelling		1.00
6	21003094000	Sticker "EAC"		1.00