




SETTING look owner's manual	690 SMC-R 769.01.198.000				FORK		SHOCK	
	Compression (clicks)	Rebound (clicks)	Change the spring (clicks)	Change high speed (turns)	Rebound (clicks)	Spring preload		
Comfort	20	20	20	2	20	18mm		
Standard	16	15	15	1.5	15	15mm		
Sport	10	10	10	1	10	10mm		
Max. payload	10	10	10	1	10	25mm		

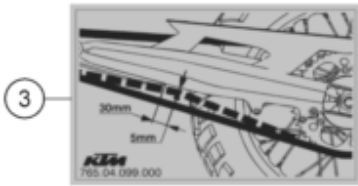


LIFE ENCYCLO		A606.01.098.000	
Fuel:	RON 95 unleaded (USA: PREMIUM PON 91)		
Tyre front:	000021 (MTR)M-S		
Air pressure front:	rider only	1.8 bar (26 psi)	
	terrain	1.5 bar (22psi)	
	max. payload	2.2 bar (32 psi)	
Tyre rear:	14000-15 (MTR)M-S		
Air pressure rear:	rider only	1.8 bar (26 psi)	
	terrain	1.5 bar (22psi)	
	max. payload	2.2 bar (32 psi)	
Max payload:	100 kg (214 lbs)		
Max. total weight:	350 kg (770 lbs)		
Engine oil:	fully synthetic: 10W/50		

Further information see owner's manual

FUSE 25A	ABS control unit
FUSE 16A	ABS control unit
FUSE 9 - 10A	ABS wakeup, dashboard wakeup, bCCU wakeup, eD sensor, OBD
FUSE 8 - 15A	ACC2, USB-charging, HCU
FUSE 7 - 10A	ACC1
FUSE 6 - 10A	High beam, low beam, position-, tail-, licence light
FUSE 5 - 10A	Horn, brake light
FUSE 4 - 10A	radiator fans
FUSE 3 - 10A	fuel pump
FUSE 2 - 10A	Ignition, ECU, EMB, fuel injection, lambda sensor
FUSE 1 - 10A	Ignition, dashboard, bCCU
SPARE 30A	
FUSE - 30A	main fuse

A606.11.087.010

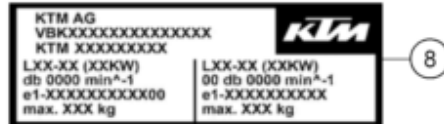

Pos	Part Number	Description	Additional Text	Quantity
1	A60007098000	Fuel tank sticker EU		1.00
2	76901198000	Sticker STD setting 690 SMC-R		1.00
3	76504099000	Sticker "Kettenspannung"		1.00
4	A60611087010	Decal fuse box		1.00
5	21003094000	Sticker "EAC"		1.00
6	A60603095000	Sticker ECE		1.00
7	A60603198000	Decal technical information, SM		1.00
8	LI25-A606-2B			1.00